

LV HRC fuse element, NH000, In: 25 A, gG, Un AC: 500 V, Un DC: 250 V, Front indicator, live grip lugs



| Model | |
|--|---------------------------------|
| Product brand name | SENTRON |
| Product designation | LV HRC fuse link |
| Design of the product | With blade contacts |
| Design of an identification indicator | Front indicators |
| Design of the switching contact | Non-corroding, silver-plated |
| Design of the fuse link | LV HRC fuse link |
| General technical data | |
| Size of fuse system / acc. to DIN EN 60269-1 | NH000 |
| Operating class of the fuse link | gG |
| circuit-breaker / Design | 3NA3 |
| Type of voltage | AC/DC |
| Current / at AC / rated value | 25 A |
| Supply voltage | |
| • at AC / rated value | 500 V |
| • at DC | 250 V |
| Protection class | |
| Protection class IP | IP20, with connected conductors |

Switching capacity

Switching capacity current

- at DC / acc. to IEC 60947-2 / rated value 25 kA
- acc. to IEC 60947-2 / rated value 120 kA

Dissipation

Power loss [W] 2.3 W

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole 2.3 W

Current

Tripping residual / rated value / derated current / at 40 Cel 23.75 A

Diken-export / Let-through energy DE_3NA_00_500_gG_25

Mechanical Design

Width

- of the enclosure 21 mm

Mounting position Any, preferably vertical

Net weight 130 g

Environmental conditions

Ambient temperature -5 ... +40 °C

- during storage Air humidity 90% at 20 °C

Environmental category -20 to +50 at 95% relative humidity

Certificates

Reference code

- acc. to DIN EN 61346-2 F
- acc. to DIN EN 81346-2 F

General Product Approval

Declaration of Conformity

Test Certificates



KEMA



VDE



EG-Konf.

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

Shipping Approval

other



GL

[Environmental Conformations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3810>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3810>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3810

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

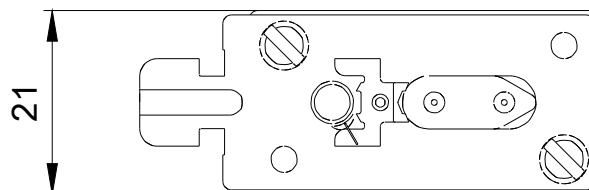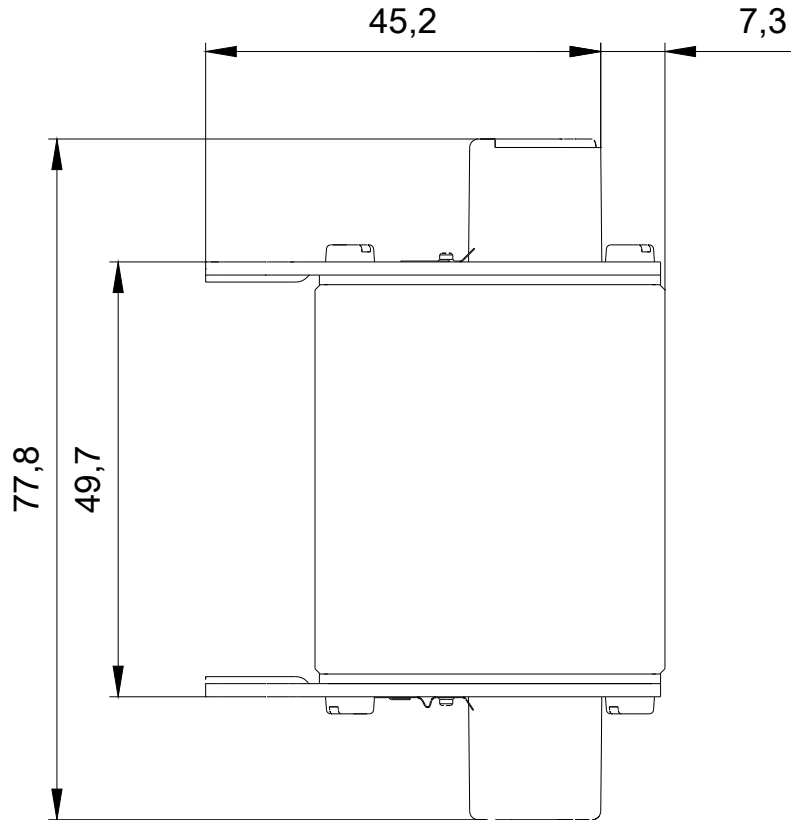

1

-F1



2

