



# **Meson Downlight**

### 59448 MESON 105 7.5W 30K WH recessed TR

The Recessed Meson downlight offers complete range in terms of lumen output and sizes with reliable performance. Available in seven cutout sizes with three CCT options to suit different applications.

#### **Product data**

General information	
Light source color	830 warm white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optic type	Wide beam
Luminaire light beam spread	110°
Cable	Cable without plug 2-pole
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
Warranty period	1 years
Constant light output	No
EU RoHS compliant	Yes
Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Inrush time	0.3 ms
Power Factor (Min)	0.5

Controls and dimming	
Dimmable	No
Mechanical and housing	
Housing Material	Plastic
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Opal
Overall height	47 mm
Overall diameter	120 mm
Color	White
Dimensions (Height x Width x Depth)	47 x NaN x NaN mm
Approval and application	
Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]
Initial performance (IEC complian	nt)
Initial luminous flux (system flux)	500 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	66.00 lm/W
Init. Corr. Color Temperature	3000 K

Datasheet, 2022, August 5 data subject to change

# **Meson Downlight**

Init. Color Rendering Index	80
Initial chromaticity	(IEC3000K, 0.44, 0.403) 6
Initial input power	7.5 W
Power consumption tolerance	+/-10%
Over time performance (IEC compliant)	
Driver failure rate at 5000 h	5 %
Median useful life L70B50	15000 h
Application conditions	
Ambient temperature range	-20 to +40 °C
Suitable for random switching	Not applicable


Product data	
Full product code	871951441475400
Order product name	59448 MESON 105 7.5W 30K WH recessed TR
EAN/UPC - Product	8719514414754
Order code	929003192402
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	929003192402
Net Weight (Piece)	0.070 kg








## Dimensional drawing

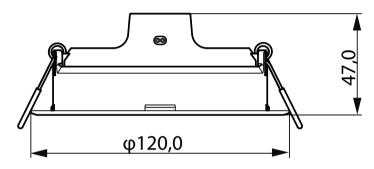


59448 MESON 105 7.5W 30K WH recessed TR

### Photometric data



Downlight 59448 MESON 105 30K WH Recessed TR-LDD



Calculat Processes of 4.1.1 Philips Lighting B.V. Page 197

Downlight 59448 MESON 105 30K WH Recessed TR-GUL

# **Meson Downlight**



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.