



MASTER PL-L 4 Pin



MASTER PL-L 36W/827/4P 1CT/25

MASTER PL-L is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Light technical	
Cap-Base	2G11 [2G11]	LSF Preheat 4000 h Rated	99 %
Life To 10% Failures (Nom)	10000 h	LSF Preheat 6000 h Rated	98 %
Life to 50% Failures (Nom)	15000 h	LSF Preheat 8000 h Rated	97 %
Life to 50% Failures Preheat (Nom)	20000 h	LSF Preheat 16000 h Rated	82 %
System Description	-	LSF Preheat 20000 h Rated	50 %
LSF 2000 h Rated	99 %	Flux measurement reference	Sphere
LSF 4000 h Rated	98 %		
LSF 6000 h Rated	96 %		
LSF 8000 h Rated	94 %		
LSF 12000 h Rated	80 %		
LSF Preheat 2000 h Rated	99 %		
		Color Code	827 [CCT of 2700K]
		Luminous Flux (Nom)	2850 lm
		Luminous Flux (Rated) (Nom)	2900 lm
		Color Designation	Incandescent White

MASTER PL-L 4 Pin

Chromaticity Coordinate X (Nom)	0.463
Chromaticity Coordinate Y (Nom)	0.42
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	81 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	93 %
LLMF 6000 h Rated	92 %
LLMF 8000 h Rated	91 %
LLMF 12000 h Rated	90 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	90 %

Operating and electrical

Power (Nom)	36.3 W
Lamp Current (Nom)	0.435 A

Temperature

Design Temperature (Nom)	30 °C
--------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Cap-Base Information	4 Pins
----------------------	--------


Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	37 kWh
EPREL Registration Number	423269

Product data

Full product code	871150070673740
Order product name	MASTER PL-L 36W/827/4P 1CT/25
EAN/UPC - Product	8711500706737
Order code	927903408270
Numerator - Quantity Per Pack	1
Local code description	4923882
Numerator - Packs per outer box	25
Material Nr. (12NC)	927903408270
Net Weight (Piece)	104.000 g
ILCOS Code	FSD-36/27/1B-E-2G11

Dimensional drawing





MASTER PL-L 36W/827/4P 1CT/25

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 36W/827/4P 1CT/25	39.0 mm	18.0 mm	384.2 mm	410 mm	416.6 mm

MASTER PL-L 4 Pin

Photometric data

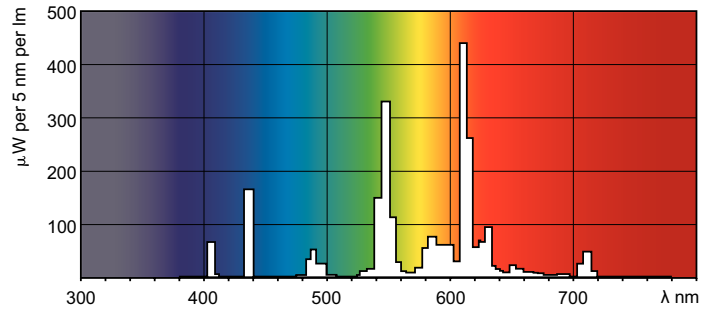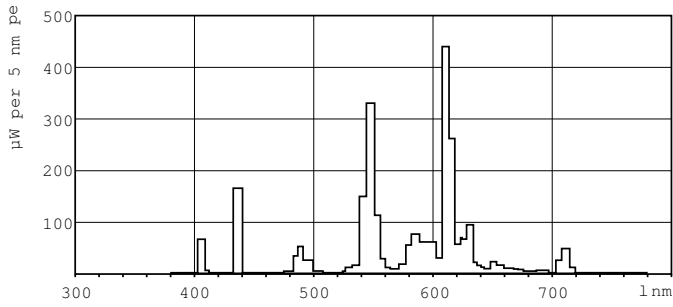

LDPB_PLL4P_827-Spectral power distribution B/W

LDPO_PLL4P_827-Spectral power distribution Colour

